


Kit includes : base, cartridge, bungee pole set and carry bag (not shown)




Open out the stabilising foot from the base so that the threaded hole is to the rear





Slide down both locking tabs on the left and right sides of the base

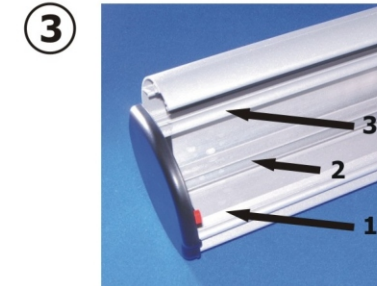



Open the base lid and note the 3 grooves inside

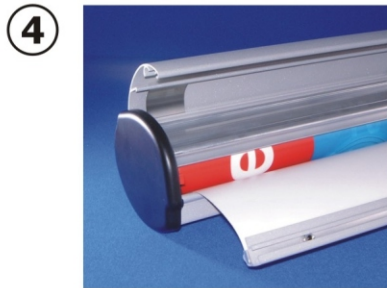

Place the cartridge into the base ensuring the cartridge rod is correctly seated into groove 1. Rotate the cartridge backwards until the remaining rods are correctly seated into grooves 2 and 3

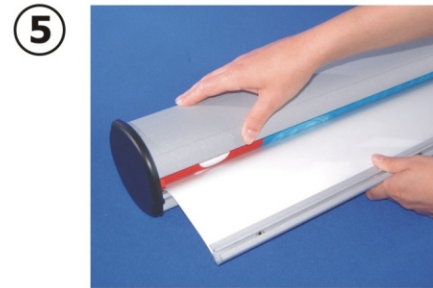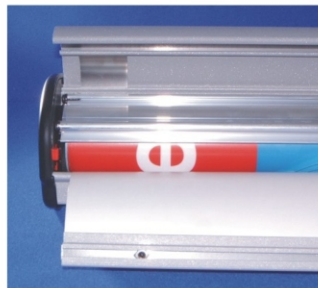

Close the base lid, ensuring both the left and right sides of the lid make contact with the cartridge. Lock the lid by sliding up both locking tabs into the position shown above

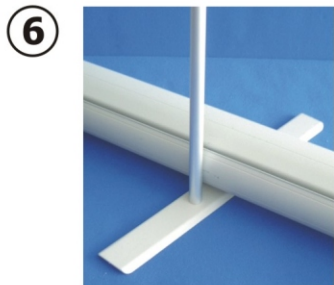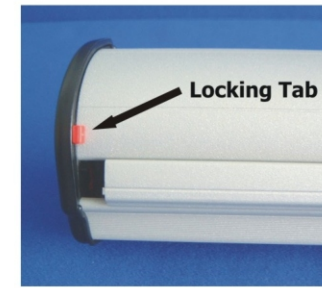

Assemble the bungee pole and screw into the stabilising foot



Lean the bannerstand backwards and extend the banner by lifting the top rail until the complete image is visible



Finally secure the banner by locating the top rail slots over the pole



Technical Specification

Visible graphic area : 2155mm (H) x 600mm to 1000mm (W) depending upon the version supplied
Note : Add 200mm to the graphic length to allow for the roller
Unit weight inc. carry bag : 5kg approx (800mm version)

Guidelines for Graphic substrates

- 1, Material thickness must be between 225 and 300 microns in total
- 2, The substrate must be pliable and suitable for roller bannerstands
- 3, After fitting, the graphic should be left for 24 hours before use to ensure the adhesive bonds sufficiently

Notes

- 1, For loading graphics into the cartridge refer to separate instruction sheet UI095
- 2, Take care when lowering the banner (do not drop) to prevent damage to the graphic