



Kit includes : base with cartridge, bungee pole set and carry bag




1 From the rear of the base, slide open both pole retainers and remove the bungee pole set




2 To open, **slide down both** locking tabs on the left and right sides of the base



3 Lift open the lid and note the 3 grooves inside the base

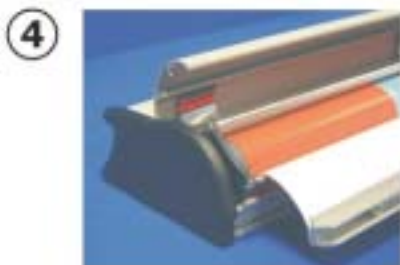

4 Place the banner cartridge into the base, ensure the cartridge rod is seated correctly into groove 1. Rotate the cartridge until the remaining rods are seated into grooves 2 and 3

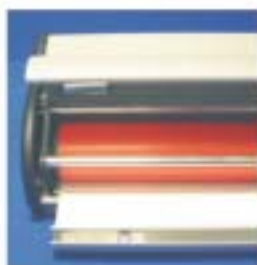

5 To close **press down firmly** onto both the left and right sides of the lid until an audible click is heard



To lock **slide up both** locking tabs into the position shown



Locking tab



8 Finally secure the banner into position by locating the top rail hole with the bungee pole



6 Assemble the bungee pole and insert into the base



7 Lean the bannerstand backwards and extend the banner by lifting the top rail until the complete image is visible

Technical Specification

Visible graphic area : 2200mm (H) x 600mm (W) depending upon the version supplied
 Note : Add 200mm to the graphic length to allow for the roller
 Unit weight inc. carry bag : 4.5kg approx (800mm version)

Guidelines for Graphic substrates

- 1, Material thickness must be between 225 and 300 microns in total
- 2, The substrate must be pliable and suitable for roller bannerstands
- 3, After fitting, the graphic should be left for 24 hours before use to ensure the adhesive bonds sufficiently

Notes

- 1, For loading graphics into the cartridge refer to separate instruction sheet UI095
- 2, Take care when lowering the banner (do not drop) to prevent damage to the graphic